

 **ZORAKI®**



www.atakarms.com

Dangerously exciting & excellence effect...

About us

Except the fact that gunsmith business was a profession of ancestors and a regional business of Zafer YİĞİT born in Beyşehir and Hüseyin ALKAN born in Düzce, both gentlemen have been engaged in acting as technical men and executives for various companies in Istanbul since 1991. Getting support of their close friends and businessmen and then conditions provided them an adequate chance to establish a gun making business in 2006 in Istanbul which they named as ATAK SİLAH SANAYİ TİCARET LİMİTED ŞİRKETİ.

The business is still maintaining its initial structure and seated at the same address to carry on its activities in the field of making blank and air guns.

Objectives

Utilizing the available technology and fields of science in the most efficient way and combining the skills of our country's people with the latest technologies with making concession of the sub-industrial, personnel, client satisfaction and environmental awareness, the firm manufactures industrial products to contribute in the country's economy and produce more than we consume.

Working Style

The firm is established to manufacture quality and specific products after making the due research and development and has shown ultimate care to these criteria within the period that had elapsed. With its professional staff each of whom is specialized in his area, the firm has enriched the concept of guns in the mankind's understanding with the modern and specific designs and creating the difference that was felt in the designs, it is moving forward in the business with confident steps with the new products and brands. Eighty percent of the firm's products are allocated for exportation and at some terms this figures goes up to form 100% of the products. The firm manufactures its own brands and it further builds products for other companies with their brands. The sub-industry has a great share in the company's products since it purchases raw materials, semi-manufactured products, final products and services from about 100 corporations. Eventually, the ATAK SİLAH undertakes all the responsibility of completing the product from the aspects designing, manufacturing and servicing (excluding using).

Quality Policy

Our firm adopts the quality policy which makes it believe that quality is a human right and prefers not to manufacture to manufacturing poor quality products and it therefore applies this policy to all its commercial and business relations and pays greatest attention to quality in everything.

It inspects and examines each step and stage of production from raw material until the final product in all fields and carefully adopts quality inspection system and provides a warranty against all negations. Customer's satisfaction is a must.





M807

M807

TECHNICAL SPECIFICATIONS

- Semi Automatic - Single Action
- Magazine release button at the bottom
- Hardened steel reinforced cock
- Hardened steel shell launcher and puller extractor
- Steel-reinforced zinc alloy mechanism (slide)
- Polymer frame
- Capability to shoot firework and signal flare

Caliber: 8 mm. P.A.K.
Barrel Length: 60 mm.
Overall Length: 120 mm.
Height: 93 mm.
Width: 22 mm.

Magazine Capacity: 7+1
Unloaded Weight: 318 gr.
Loaded Magazine Total Weight: 340 gr.
Number of Component: 38 pcs.
Ambient Operating Temperature: -15°... +50°

02-03



M2807



M2807

TECHNICAL SPECIFICATIONS

- Semi Automatic - Single Action
- Magazine release button at the bottom
- Hardened steel reinforced cock
- Hardened steel shell launcher and puller extractor
- Steel-reinforced zinc alloy mechanism (slide)
- Polymer frame
- Capability to shoot firework and signal flare

Caliber: 8 mm. P.A.K.
Barrel Length: 60 mm.
Overall Length: 120 mm.
Height: 93 mm.
Width: 22 mm.

Magazine Capacity: 7+1
Unloaded Weight: 333 gr.
Loaded Magazine Total Weight: 355 gr.
Number of Component: 38 pcs.
Ambient Operating Temperature: -15°... +50°

04-05



M906



M906

TECHNICAL SPECIFICATIONS

- Semi Automatic - Single Action
- Magazine release button at the bottom
- Hardened steel reinforced cock
- Hardened steel shell launcher and puller extractor
- Steel-reinforced zinc alloy mechanism (slide)
- Polymer frame
- Capability to shoot firework and signal flare

Caliber: 8 mm. P.A.K.
Barrel Length: 60 mm.
Overall Length: 120 mm.
Height: 93 mm.
Width: 22 mm.

Magazine Capacity: 7+1
Unloaded Weight: 333 gr.
Loaded Magazine Total Weight: 355 gr.
Number of Component: 38 pcs.
Ambient Operating Temperature: -15°... +50°

06-07



M2906



M2906

TECHNICAL SPECIFICATIONS

- Semi Automatic - Single Action
- Mechanism lock by hardened steel side button when out of cartridge
- Magazine release button at the bottom
- Hardened steel reinforced cock
- Hardened steel cock latch
- Hardened steel shell launcher and puller extractor
- Steel-reinforced zinc alloy mechanism (slide)
- Polymer frame
- Capability to shoot firework and signal flare

Caliber: 9 mm. P.A.K.

Barrel Length: 71 mm.

Overall Length: 143 mm.

Height: 105 mm.

Width: 25.5 mm.

Magazine Capacity: 6+1

Unloaded Weight: 480 gr.

Loaded Magazine Total Weight: 515 gr.

Number of Component: 56 pcs.

Ambient Operating Temperature: -15°... +50°

08-09





914

914

TECHNICAL SPECIFICATIONS

- Semi (Optional Full) Automatic - Double Action
- Mechanism lock by side button when out of cartridge
- Magazine release button at the side
- Hardened steel reinforced cock
- Hardened steel cock latch (only in full-auto model)
- Hardened steel shell launcher and puller extractor
- Steel-reinforced zinc alloy mechanism (slide)
- Capability to shoot firework and signal flare

Caliber: 9 mm. P.A.K.
Barrel Length: 85 mm.
Overall Length: 154 mm.
Height: 121 mm.
Width: 35 mm.

Magazine Capacity: 14+1
Unloaded Weight: 730 gr.
Loaded Magazine Total Weight: 810 gr.
Number of Component: 47 pcs.
Ambient Operating Temperature: -15° ... +50°

10-11



2914



2914

TECHNICAL SPECIFICATIONS

- Semi Automatic - Double Action
- Mechanism lock by side button when out of cartridge
- Magazine release button at the side
- Hardened steel reinforced cock
- Hardened steel shell launcher and puller extractor
- Steel-reinforced zinc alloy mechanism (slide)
- Capability to shoot firework and signal flare
- New ergonomic grips design.

Caliber: 9 mm. P.A.K.

Barrel Length: 85 mm.

Overall Length: 159 mm.

Height: 125 mm.

Width: 35 mm.

Magazine Capacity: 14+1


Unloaded Weight: 735 gr.

Loaded Magazine Total Weight: 815 gr.

Number of Component: 47 pcs.

Ambient Operating Temperature: -15° ... +50°

12-13

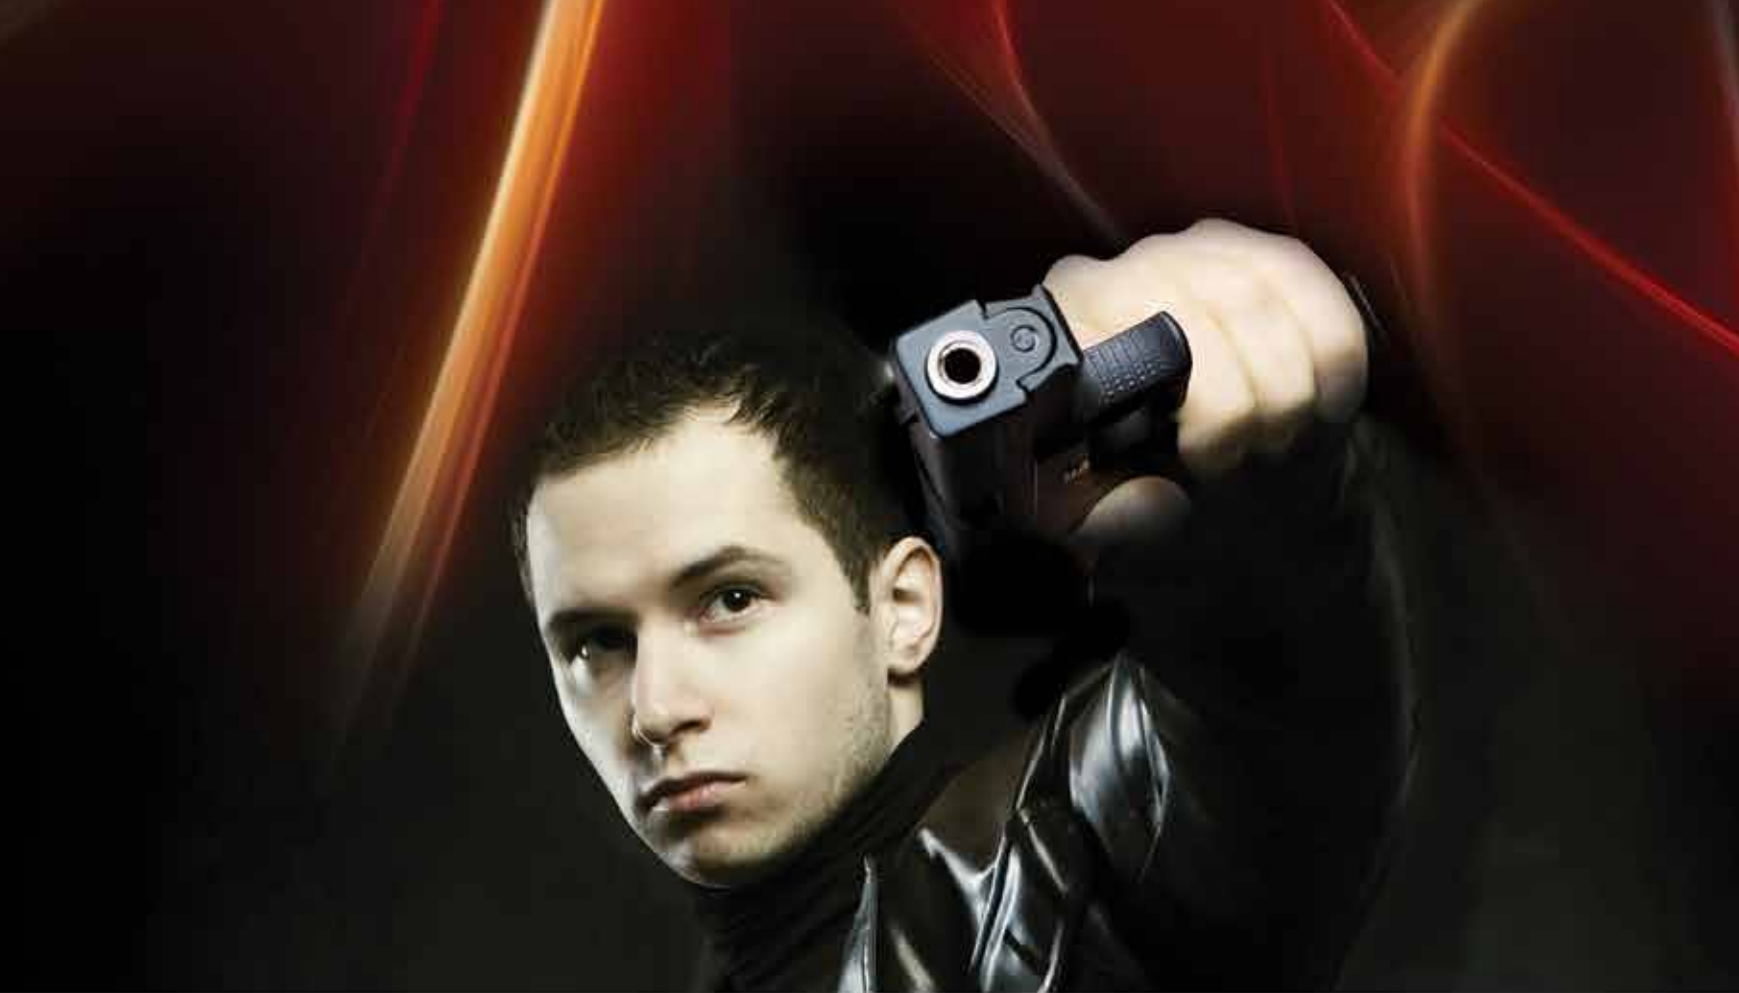



917

917

TECHNICAL SPECIFICATIONS

- Semi Automatic - Double Action
- Mechanism lock by hardened steel side button when out of cartridge
- Magazine release button at the side
- Hardened steel reinforced hidden cock
- Hardened steel cock latch
- Hardened steel cock-lowering
- Hardened steel shell launcher and puller extractor
- Steel-reinforced zinc alloy mechanism (slide)
- Polymer frame
- Capability to shoot firework and signal flare

Caliber: 9 mm. P.A.K.

Barrel Length: 107 mm.

Overall Length: 190 mm.

Height: 135 mm.

Width: 33 mm.

Magazine Capacity: 17+1

Unloaded Weight: 870 gr.

Loaded Magazine Total Weight: 968 gr.

Number of Component: 51 pcs.

Ambient Operating Temperature: -15°... +50°

14-15



918



918

TECHNICAL SPECIFICATIONS

- Semi Automatic - Double Action
- Mechanism lock by hardened steel side button when out of cartridge
- Magazine release button at the side
- Hardened steel reinforced cock
- Hardened steel shell launcher and puller extractor
- Steel-reinforced zinc alloy mechanism (slide)
- Capability to shoot firework and signal flare
- Polymer frame

Caliber: 9 mm. P.A.K.

Barrel Length: 131,5 mm

Overall Length: 219 mm.

Height: 143 mm.

Width: 35 mm.

Magazine Capacity: 18 + 1

Unloaded Weight: 870 gr.

Loaded Magazine Total Weight: 973 gr.

Number of Component: 65 pcs.

Ambient Operating Temperature: -15° ... +50°

16-17





2918

2918

TECHNICAL SPECIFICATIONS

- Semi Automatic - Double Action
- Mechanism lock by hardened steel side button when out of cartridge
- Magazine release button at the side
- Hardened steel reinforced cock
- Hardened steel shell launcher and puller extractor
- Steel-reinforced zinc alloy mechanism (slide)
- Capability to shoot firework and signal flare
- Polymer frame

Caliber: 9 mm. P.A.K.

Barrel Length: 112 mm

Overall Length: 205 mm.

Height: 143 mm.

Width: 35 mm.

Magazine Capacity: 18 + 1

Unloaded Weight: 880 gr.

Loaded Magazine Total Weight: 980 gr.

Number of Component: 65 pcs.

Ambient Operating Temperature: -15° ... +50°

18-19





4918

4918

TECHNICAL SPECIFICATIONS

- Semi Automatic - Double Action
- Mechanism lock by hardened steel side button when out of cartridge
- Magazine release button at the side
- Hardened steel reinforced cock
- Hardened steel shell launcher and puller extractor
- Steel-reinforced zinc alloy mechanism (slide)
- Capability to shoot firework and signal flare
- Polymer frame

Caliber: 9 mm. P.A.K.

Barrel Length: 112 mm

Overall Length: 205 mm.

Height: 143 mm.

Width: 35 mm.

Magazine Capacity: 18 + 1

Unloaded Weight: 900 gr.

Loaded Magazine Total Weight: 1000 gr.

Number of Component: 65 pcs.

Ambient Operating Temperature: -15° ... +50°

20-21





925

925

TECHNICAL SPECIFICATIONS

- Semi & Full Automatic - Double Action
- Mechanism lock by side button when out of cartridge
- Magazine release button at the side
- Hardened steel reinforced hidden cock
- Hardened steel cock latch (only in full-auto model)
- Hardened steel shell launcher and puller extractor
- Steel-reinforced zinc alloy mechanism (slide)
- Polymer outer frame
- Closable window when throwing cartridge
- Easy, ergonomic pull lever mechanism
- Capability to shoot firework and signal flare

Caliber: 9 mm. P.A.K.

Barrel Length: 92 mm. & 103 mm.

Overall Length: 191 mm. & 202 mm.

Height: 143 mm. & 198 mm.

Width: 35 mm.

Magazine Capacity: 16+1 & 25+1

Unloaded Weight: 780 gr. & 820 gr.

Loaded Magazine Total Weight: 872 gr. & 964 gr.

Number of Component: 70 pcs.

Ambient Operating Temperature: -15°... +50°

Shots per minute: 1000 rounds (+200)

22-23



R1-2.5"



R1-2.5"

TECHNICAL SPECIFICATIONS

- Double Action
- Cylinder (drum) release button at the side
- Steel / zinc alloy shell extractor ladder
- Steel / zinc alloy cylinder (drum)
- Hardened steel cylinder (drum) lock
- Hardened cylinder (drum) revolver
- Zinc alloy frame
- Capability to shoot firework and signal flare

Caliber: 9 mm. P.A.K. 380 R Blank 6 rounds & 6 mm / 4 mm Flobert 9 rounds

Barrel Length: 2.5"

Overall Length: 186 mm.

Height: 140 mm.

Width: 36 mm.

Cylinder Capacity: 6 & 9

Unloaded Weight: 750 gr.

Loaded Cylinder Total Weight: 784 gr.

Number of Component: 42 pcs.

Ambient Operating Temperature: -15° ... +50°

24-25



R1-4.5"



R1-4.5"

TECHNICAL SPECIFICATIONS

- Double Action
- Cylinder (drum) release button at the side
- Steel / zinc alloy shell extractor ladder
- Steel / zinc alloy cylinder (drum)
- Hardened steel cylinder (drum) lock
- Hardened cylinder (drum) revolver
- Zinc alloy frame
- Capability to shoot firework and signal flare

Caliber: 9 mm. P.A.K. 380 R Blank 6 rounds & 6 mm / 4 mm Flobert 9 rounds

Barrel Length: 4.5"

Overall Length: 235 mm.

Height: 140 mm.

Width: 36 mm.

Cylinder Capacity: 6 & 9

Unloaded Weight: 850 gr.

Loaded Cylinder Total Weight: 884 gr.

Number of Component: 42 pcs.

Ambient Operating Temperature: -15° ... +50°

26-27



R1-6"



R1-6"

TECHNICAL SPECIFICATIONS

- Double Action
- Cylinder (drum) release button at the side
- Steel / zinc alloy shell extractor ladder
- Steel / zinc alloy cylinder (drum)
- Hardened steel cylinder (drum) lock
- Hardened cylinder (drum) revolver
- Zinc alloy frame
- Capability to shoot firework and signal flare

Caliber: 9 mm. P.A.K. 380 R Blank 6 rounds & 6 mm / 4 mm Flobert 9 rounds

Barrel Length: 6"

Overall Length: 275 mm.

Height: 140 mm.

Width: 36 mm.

Cylinder Capacity: 6 & 9

Unloaded Weight: 890 gr.

Loaded Cylinder Total Weight: 924 gr.

Number of Component: 42 pcs.

Ambient Operating Temperature: -15° ... +50°

28-29



R2-2"



R2-2"

TECHNICAL SPECIFICATIONS

- Double Action
- Cylinder (drum) release button at the side
- Steel / zinc alloy shell extractor ladder
- Steel / zinc alloy cylinder (drum)
- Hardened steel cylinder (drum) lock
- Hardened cylinder (drum) revolver
- Zinc alloy frame
- Capability to shoot firework and signal flare

Caliber: 9 mm. P.A.K. 380 R Blank 6 rounds & 6 mm / 4 mm Flobert 9 rounds

Barrel Length: 2"

Overall Length: 175 mm.

Height: 123 mm.

Width: 36 mm.

Cylinder Capacity: 6 & 9

Unloaded Weight: 665 gr.

Loaded Cylinder Total Weight: 700 gr.

Number of Component: 42 pcs.

Ambient Operating Temperature: -15° ... +50°

30-31



R2-3"



R2-3"

TECHNICAL SPECIFICATIONS

- Double Action
- Cylinder (drum) release button at the side
- Steel / zinc alloy shell extractor ladder
- Steel / zinc alloy cylinder (drum)
- Hardened steel cylinder (drum) lock
- Hardened cylinder (drum) revolver
- Zinc alloy frame
- Capability to shoot firework and signal flare

Caliber: 9 mm. P.A.K. 380 R Blank 6 rounds & 6 mm / 4 mm Flobert 9 rounds

Barrel Length: 3"

Overall Length: 200 mm.

Height: 140 mm.

Width: 36 mm.

Cylinder Capacity: 6 & 9

Unloaded Weight: 710 gr.

Loaded Cylinder Total Weight: 738 gr.

Number of Component: 42 pcs.

Ambient Operating Temperature: -15° ... +50°

32-33



HP-01

LIGHT PNEUMATIC



HP-01

LIGHT

PNEUMATIC

MULTI-PUMP PNEUMATIC AIR PISTOL TECHNICAL SPECIFICATIONS

- Compresses air with minimum effort
- Multi power levels
- Adjustable trigger with four unique settings
- Adjustable plastic orthopedic grip with ergonomic design
- Rail for laser, binoculars, 'red dot' or any weight scope
- Automatic trigger safety
- Recoil free shooting
- Rifled steel barrel & high corrosion resistance
- Adjustable rear and front sight
- Polymer frame
- Elegant carrying case with allen key
- Cleaning rod, and oil

CAL.: 4.5 mm. - .177 Pellet	CAL.: 5.5mm. - .22 Pellet
Length: 300 mm.	
Height: 172 mm.	
Width: 39 mm.	
Grip Width: 51 mm.	
Weight: 1100 gr.	
Trigger Pull: 350 - 1800 gr.	
Rear Sight Dimensions & Maximal Range: 100 m.	
Safety Distance: 350 m.	
Number of Rifled: Set 12	
Barrel Length: 181.5 mm.	
Maximum Energy: 10.4 joule cal. 4.5 mm 0.48 gr.	10.8 joule cal. 5.5 mm 0.92 gr.
Muzzle Velocity: 1. pump 120 m/s 0.48 gr.	80 m/s 0.92 g.
2. pump 160 m/s 0.48 gr.	120 m/s 0.92 g.
3. pump 190 m/s 0.48 gr.	144 m/s 0.92 g.



HP-01

ULTRA PNEUMATIC



HP-01

ULTRA

PNEUMATIC

MULTI-PUMP PNEUMATIC AIR PISTOL TECHNICAL SPECIFICATIONS

- Compresses air with minimum effort
- Multi power levels
- Adjustable trigger with four unique settings
- Adjustable plastic orthopedic grip with ergonomic design
- Rail for laser, binoculars, 'red dot' or any weight scope
- Automatic trigger safety
- Recoil free shooting
- Rifled steel barrel & high corrosion resistance
- Adjustable rear and front sight
- Polymer frame
- Elegant carrying case with allen key
- Cleaning rod, and oil

CAL.: 4.5 mm. - .177 Pellet	CAL.: 5.5mm. - .22 Pellet
Length: 376 mm.	
Height: 172 mm.	
Width: 39 mm.	
Grip Width: 51 mm.	
Weight: 1150 gr.	
Trigger Pull: 350 - 1800 gr.	
Rear Sight Dimensions & Maximal Range: 100 m.	
Safety Distance: 350 m.	
Number of Rifled: Set 12	
Barrel Length: 260 mm.	
Maximum Energy: 13.57 joule cal. 4.5 mm 0.48 gr.	15.30 joule cal. 5.5 mm 0.92 gr.
Muzzle Velocity: 1. pump 130 m/s 0.48 gr.	93 m/s 0.92 g.
2. pump 175 m/s 0.48 gr.	135 m/s 0.92 g.
3. pump 205 m/s 0.48 gr.	155 m/s 0.92 g.
4. pump 225 m/s 0.48 gr.	175 m/s 0.92 g.


36-37



ZORAKI®

HP01-2

MODULAR STOCK LIGHT & ULTRA

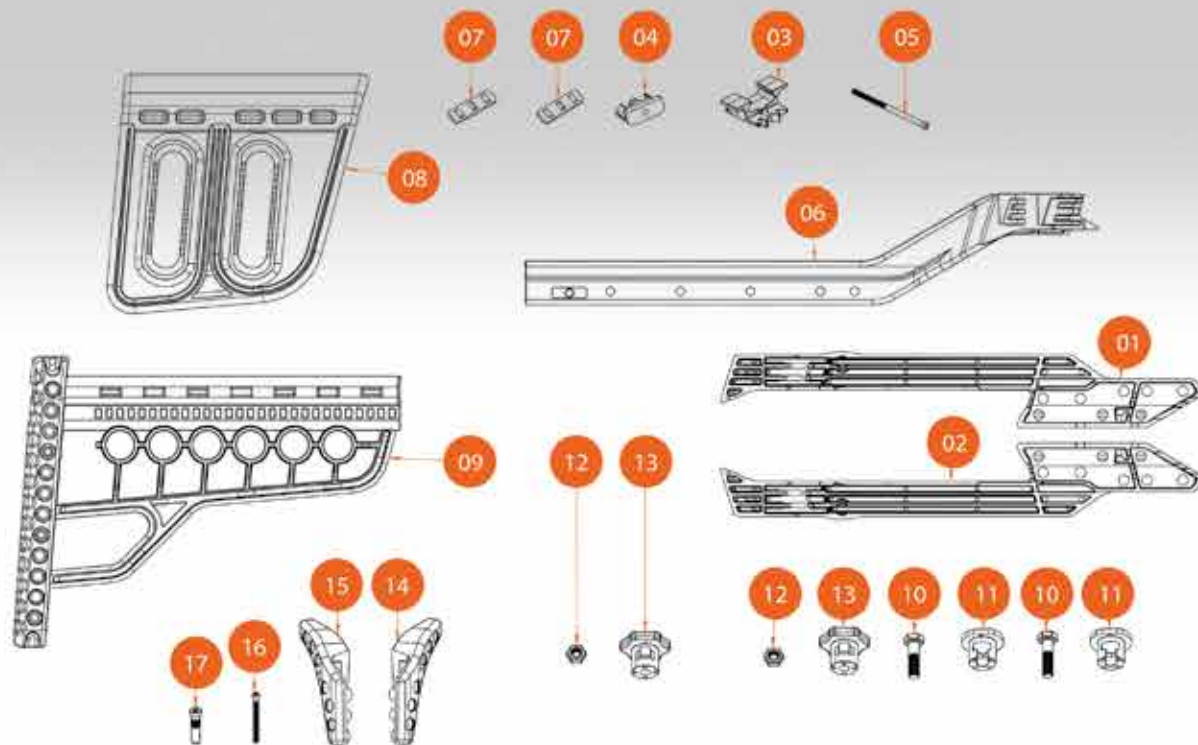

HP-01 - HP01-2

- Modular Stok for HP-01 & HP01-2
- Polymer frame
- Easy to install with one key
- Possibility to use left and right (single) cheek kit without disassemble
- Adjustable cheek kit, approximately 50 mm. up & down
- Adjustable cheek kit, approximately 75 mm. backwards & forwards in three stage
- Adjustable shoulder kit, approximately 100 mm. up & down
- Adjustable length of stok, approximately 80 mm. backwards & forwards according to shooter arms length
- Special key for assembly
- User's guide support

HP01-2

LIGHT & ULTRA

MODULAR STOCK

38-39



www.atakarms.com

Products in this catalogue are definitely not a toy.

Under age 18 can not be for sale.

Sale and transportation of products are specified by countries law.

Printings and colour deviations may different from its original visuals in this catalogue.

Our company reserves the right to make changes to products without prior notice.

Catalogue print date: 02/2014

 **ZORAKI®**



ATAK SİLAH SAN. TİC. LTD. ŞTİ.
İmes San. Sit. A Blok 107 Sk. No:70
34775 Yukarı Dudullu, Ümraniye - İstanbul / TÜRKİYE
TEL: 0 216 420 39 96 - 0 216 420 39 97 FAKS: 0 216 420 39 98
www.atakarms.com